

aero aerosol bench maintenance

AERO® brand aerosols are the finest available anywhere. A full range of solutions, from cleaning, to pest control. No other products can match our standards or our commitment to quality.

HIGHLIGHTS

- Lubricates
- Inhibits corrosion
- Prevents screws from seizing
- Contains synergetic blend of metals for superior performance

TYPICAL PROPERTIES


- Specific Gravity: **0.87**
- Propellant: **Hydrocarbon**
- Spray Characteristics: **Coarse spray**
- Appearance: **Grey Liquid**
- Odor: **Solvent**
- Net Weight: **12 ounces**

SAFETY CAUTIONS

- Keep out of reach of children.
- Contents under pressure. Do not expose to heat or store at temperatures exceeding 120° F. Do not use near sparks or open flames. Do not puncture or incinerate container. Wrap empty container and put in trash collection.
- Refer to M.S.D.S. for additional safety information.

HMIS RATINGS

Flammability
Health **2** **4** **0** Reactivity
Personal Protection
G

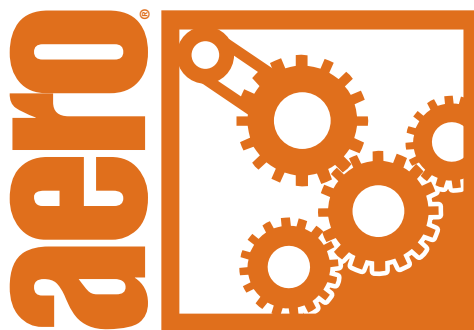

Anti Seize

Lubricant & Protective Coating

This unique formulation of copper, aluminum and graphite is for use on screws and clamps as they are fastened onto machinery. ANTI SEIZE allows these screws to be removed even after years in place. ANTI SEIZE is still effective even after extreme temperature swings and exposure to salt water.

RECOMMENDED USES: Threaded fittings (including nuts, bolts and screws); Hand and motor operated valves; Gaskets, flanges, and "O" rings; Bushings, bearings, rollers and conveyors; Gears, transmission boxes, chains and drives; Electric motors, compressors, hoists, turbines and winches; Furnaces, burner assemblies, regulators, pumps, valve stems, control chests and headers; Manifold and stud assemblies; Fuel injectors, pre-combustion chambers, valve cages, turbo-charger fittings, guides and thread tubing; Keyways and spark plugs; Torque rod pins and tubes; Air cylinder assemblies, pneumatic cylinder shafts, air slides and axle shafts.

DIRECTIONS- Shake well before using. Clean surface thoroughly. Apply only enough to form a solid film over contact surfaces of threads, gaskets, bushings, etc. Assemble and wipe off excess.

distributed by:

aero

CHEMICAL COMPANY

a division of:
ABC COMPOUNDING CO., INC.
Atlanta, Georgia Dallas, Texas