

# aero aerosol bench maintenance

AERO® brand aerosols are the finest available anywhere. A full range of solutions, from cleaning, to pest control. No other products can match our standards or our commitment to quality.

## HIGHLIGHTS

- Reduces friction / Retards wear
- Effective up to 1000°F
- Excellent under high pressure loads

## TYPICAL PROPERTIES


- Specific Gravity: **0.76**
- Propellant: **Hydrocarbon**
- Spray Characteristics: **Coarse spray**
- Appearance: **Dark liquid**
- Odor: **Solvent**
- Net Weight: **13 ounces**

## SAFETY CAUTIONS

- Keep out of reach of children.
- Contents under pressure. Do not expose to heat or store at temperatures exceeding 120° F. Do not use near sparks or open flames. Do not puncture or incinerate container. Wrap empty container and put in trash collection.
- Refer to M.S.D.S. for additional safety information.

## HMIS RATINGS

Flammability  
Health **2** **4** **0** Reactivity  
Personal Protection  
**G**

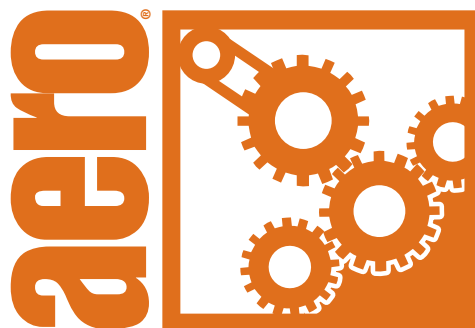

## Moli-Lube Dry Lubricant Spray

MOLI-LUBE is a dry molibdium disulfide and graphite product that keeps machined metal from oxidizing and lubricates in extreme environments. Moli-Lube will not wash off. Once it dries, it will stay in place providing lubricity even under very heavy loads (in excess of 20,000 psi). Excellent for oil field pipe threads. Effective up to 1000°F.

**RECOMMENDED FOR:**  
REDUCING SLIDING FRICTION  
CHAIN / SPROCKET LUBRICATION  
RELEASE AGENT  
DOOR LOCKS / HINGES  
LATHE BED AND RAILS  
MACHINE SHOPS

**DIRECTIONS-** Shake well before using. Clean surface thoroughly. Hold can 6 to 8 inches from surface and apply even, thin coats. Allow 1 to 5 minutes for adequate drying. The concentration of solids in this product may clog nozzle. Shake vigorously and often. Before storing, turn can upside down and spray until nozzle is clear.

distributed by:

**aero**

CHEMICAL COMPANY

a division of:  
**ABC COMPOUNDING CO., INC.**  
Atlanta, Georgia Dallas, Texas