

aero aerosol bench maintenance

AERO® brand aerosols are the finest available anywhere. A full range of solutions, from cleaning, to pest control. No other products can match our standards or our commitment to quality.

HIGHLIGHTS

- Clinging formulation
- Lubricates and cools
- Inhibits corrosion

TYPICAL PROPERTIES


- Specific Gravity: **0.885**
- Propellant:: **Hydrocarbon**
- Spray Characteristics:
Foaming spray
- Appearance: **Brown Liquid**
- Odor: **Solvent**
- Net Weight: **16 ounces**

SAFETY CAUTIONS

- Keep out of reach of children.
- Contents under pressure. Do not expose to heat or store at temperatures exceeding 120° F. Do not use near sparks or open flames. Do not puncture or incinerate container. Wrap empty container and put in trash collection.
- Refer to M.S.D.S. for additional safety information.

HMIS RATINGS

Flammability
Health **2** **4** **0** Reactivity
Personal Protection
G

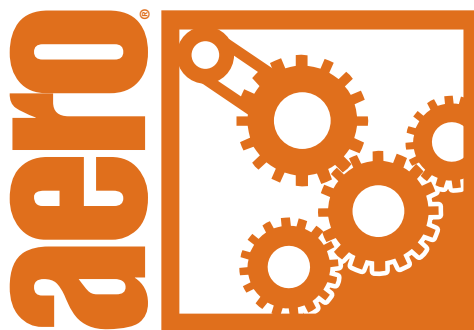

Cutting & Tapping Fluid

Clinging Coolant and Lubricant for Machining Operations

CUTTING & TAPPING FLUID is a special blend of synthetic oils and thickening agents, this product remains on the cutting bit even under extreme pressures. Keeps operating temperatures cool. Protects from rust and corrosion. Not recommended for use on copper or aluminum.

DIRECTIONS

Shake well before using. Hold nozzle 6 to 8 inches from surface requiring lubrication. Generously spray onto cutting surface or tool. Reapply as necessary to maintain lubrication level.

distributed by:

aero

CHEMICAL COMPANY

a division of:
ABC COMPOUNDING CO., INC.
Atlanta, Georgia Dallas, Texas