

# aero® non-resilient floor care

AERO®'s Non-Resilient Floor Care Line provides a product for every application and maintenance technique employed by today's floor maintenance supervisor.

## HIGHLIGHTS

- Quick acting seal and varnish remover
- Removes most: paints, varnishes, shellacs, polyurethanes, lacquers, etc.
- Excellent for vertical and inclined surfaces, metal, wood and concrete surfaces


## TYPICAL PROPERTIES

- Appearance: **Colorless gel**
- Odor: **Citrus**
- Viscosity: **5,000 cps**


## SAFETY CAUTIONS

- Keep out of reach of children.
- It is recommended that protective gloves and safety glasses be worn when using this product.
- Make sure there is adequate ventilation.
- Refer to M.S.D.S. for additional safety information and directions for use.

## HIMIS RATINGS

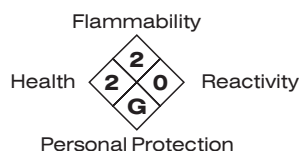

# aero®

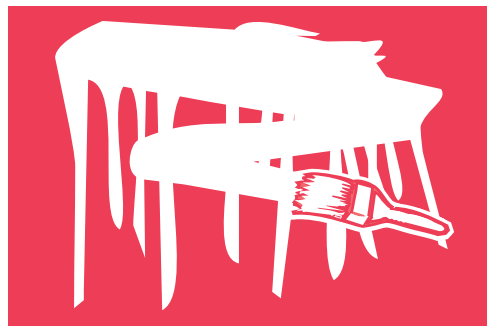

## GUP Paint and Polyurethane Stripper

**With Natural Citrus Oils**

**THIS PRODUCT IS A GELLED FORMULATION DESIGNED FOR USE ON:**

•Fiberglass •Glass •Concrete •Carpet & Upholstery •Tile •Most Fabrics •Canvas •Boats •Metals •Aircraft •Appliances •Wood •Counters & Cabinets •Marble •Construction Equipment •Tools & Machinery •Tubs & Showers •Walls •MUCH MORE

**REMOVES:**

•Stickers & Labels •Grease •Specialty Adhesives •Oil •Tape •Tree Sap •Ink •Candle Wax •Paint •Crayon •Soap Scum •Adhesives •Nail Polish •Chewing Gum •Lipstick •Tar/Asphalt •Makeup •Scuff Marks •Oil Based Paint •Fresh Blood •Shoe Polish •Cured Thermoplastics •Uncured Urethane •Epoxy •Over spray •Enamel •Lacquer •Latex •Polyurethane •Shellac •Varnish •Mastic •All kinds of GOO!

**DIRECTIONS:** Remove any thick excess material. Apply this product directly onto surface or onto a clean cloth and rub area to dissolve mess. Scrub if necessary. Wipe with damp, clean cloth to remove any residue. Allow to dry. For deep, thick, or stubborn problems, apply directly onto surface and allow 30-60 seconds to penetrate. Wash with soap and water afterwards. **FOR PAINT & VARNISH STRIPPING:** Apply liberally onto surface and spread with paint brush. Allow gel to penetrate for 20-30 minutes. Test a small section to see if paint is lifting easily. Remove with putty knife or scraper. Use steel wool or toothbrush for hard to reach areas. Wipe off excess with heavy duty paper wipes or cloth. Wash surface clean with detergent and water or alcohol. Allow to dry thoroughly before refinishing.

**PRECAUTIONS:** Avoid eye contact or prolonged skin exposure. Use in well-ventilated area. Keep all cleaning products out of reach of children and pets. This product is not recommended for rubber, soft plastics, vinyl, linoleum, plexiglass, leather, silk, satin, suede, pearls, opals, wool, wool blends, or non-washables. Always test for colorfastness and compatibility first by applying this product to an inconspicuous area. Do not allow product to remain on carpeted areas for more than 2 minutes as it can remove the adhesive that affixes the carpet fibers to the backing. Always rinse or wipe off any residual product thoroughly.

distributed by:

**aero®**  
CHEMICAL COMPANY

a division of:  
**ABC COMPOUNDING CO., INC.**  
Atlanta, Georgia Dallas, Texas