

# aero<sup>®</sup> solvent degreasers

AERO<sup>®</sup> Solvent Degreasers are designed to meet a wide variety of heavy-duty industrial cleaning requirements and environmental concerns.

## HIGHLIGHTS

- Good dry time
- Heavy duty
- For cold immersion tanks
- Non-flammable



## TYPICAL PROPERTIES

- Specific Gravity: 0.87
- Dielectric Breakdown Voltage: 32,500 volts
- Flash Point: 105°F
- Evaporation Rate: 0.2
- Residue on Drying: None
- KB Value: 80
- Appearance: Clear liquid
- Odor: Moderate solvent
- NSF: K-1

## SAFETY CAUTIONS

- Keep out of reach of children.
- CAUTION: COMBUSTIBLE MIXTURE.
- It is recommended that protective gloves and safety glasses be worn when using this product.
- Make sure there is adequate ventilation.
- Refer to M.S.D.S. for additional safety information.

## HMIS RATINGS

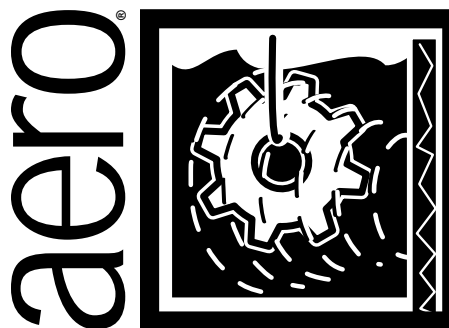

## Solv 200

### Heavy Duty Solvent Degreaser Circulating Parts Cleaner & Waterless Wood Cleaner

Solv 200 is highly effective in removing heavy greases, oils, adhesives, lubricants, tar, waxes, asphalt, resins, etc. Dries fast, leaves no residue, non-conductive. Safe on ferrous and non-ferrous metals, and on many types of plastics, such as polyethylene, polypropylene, PETE and PVC. Solv 200 may be substituted for chlorinated solvents in applications below.

**Cold degreasing:** May be used for immersion cleaning in non-agitated vats, circulation-type units, ultrasonic, air-agitated and pressure-spray units. Soak until clean. If desired, remove parts from vat and spray fresh product to flush away dissolved soils. Let product evaporate, or blow dry with air.

**Electrical contact cleaning:** May be used to clean electrical and electronic parts and equipment. If wiring is present, use CIP method for a maximum contact time of 60 seconds. De-energize equipment first and blow dry with air before turning back on. Do not spray on hot surfaces. Do not use on operating equipment that may spark or that has an open flame.

**Hardwood floor cleaning:** Use a cloth, sponge or mop and go over floor completely. Do not saturate cleaning apparatus, but make sure it is well moistened, if floor is extremely dirty, a second mopping may be necessary.



Nonfood Compounds  
Program Listed K1  
Registration #: 134719



Innovative. Expansive. Flexible.

Manufactured exclusively by:  
**ABC Compounding Co., Inc.**  
Atlanta, GA Dallas, TX

Aero is a registered trademark of  
ABC Compounding Co., Inc.  
P. O. Box 16247 Atlanta, Georgia 30321-0247